


TMS-2000^{RC}

The Ultimate Disk Measurement System

NEW

Radial & Circumferential Measurements of Sub Angstrom Ultra Smooth Disks

•••• LESS THAN 1Å ••••

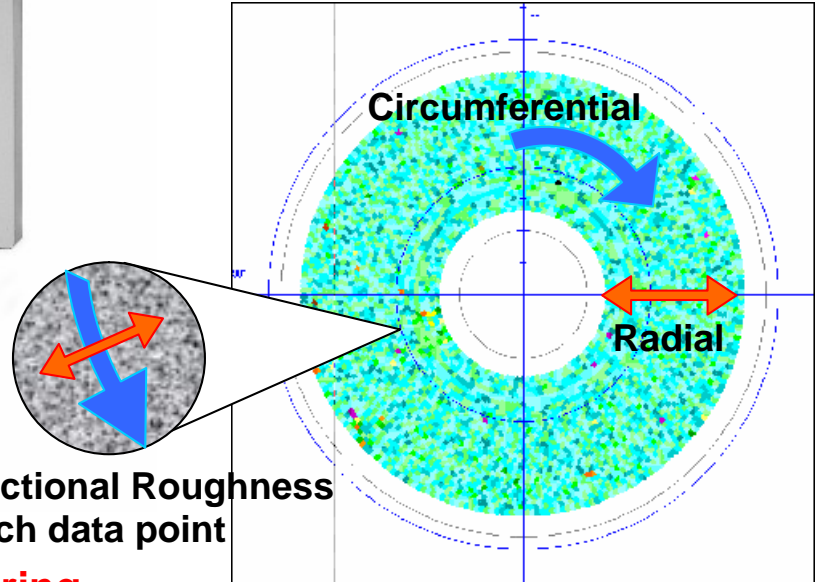

Bi-directional Roughness For each data point

Revolutionizing Disk Manufacturing

The fastest, most accurate, non-contact texture measurement system in the world. Laser technology of today for the future. The system collects scattered light and segments the scattered light to compare anisotropic and isotropic roughness of the surface. Currently being used successfully by major disk manufacturers. Discover the ultimate solution to fast, accurate measurements in disk manufacturing.

Features:

- **Non-Contact Measurements** cannot harm test surfaces
- **Results** – RA, RMS roughness from 0.2Å up to 1,000Å
- **Cost** – Lower costs than Profilometer, AFM or Interferometers
- **Precision** – Resolution of 0.1Å reproducibility +/-0.2Å and repeatability: +/-0.1 Å
- **Speed** – Typically 100 test points per second

Benefits:

- Quadruple Production Throughput
- Measures Radial, Circumferential, Total, Interrupted & Zone Textures
- Increased Performance/Quality
- Unaffected by environmental conditions
- Minimal operator training required
- Lowest cost per measurement of any system
- Correlates to other measurement instruments via slope/offset or bandwidth compensation.

The Ultimate In Microroughness Measurements

The fastest, highest resolution, most stable non-contact microroughness measurement system in the world. Advanced laser-based system ideally suited for quantifying and mapping full surface, interrupted, and zone textures. The roughness direction is selectable

from Radial, Circumferential, or Total. Now used by major disk and wafer manufacturers. Discover the ultimate answer to fast, reliable microroughness measurements in disk manufacturing, with systems that simplify lab to manufacturing correlation.

■ Measurements

Technical Specifications

Source:	Class II Laser, 670 nm	Resolution:	0.1Å
Spot Size:	~1mm diameter	Repeatability:	±0.1Å (same sample, same machine)
Number of Spots:	Programmable (full sample to single test point)	Reproducibility:	±0.2 Å (whichever is greater) (same sample, same machine)
Primary & Secondary Results:	RA or RMS (Rq) Microroughness P-V, RMS Slope, TIS, Diffuse Reflectance, Total Reflectance, Specular Reflectance, R-C Ratio	Spatial Filtering Frequency: (wavelength)	Low Band: 0.026 to 0.129 μm^{-1} (7.8 to 38 μm) High Band: 0.129 to 1.14 μm^{-1} (0.88 to 7.8 μm) Full Band: 0.026 to 1.14 μm^{-1} (0.88 to 38 μm) Comp Band: Selectable from 0.2 to 150 μm
Speed:	100 Measurements per second★	Microroughness:	Selectable between Radial, Circumferential, or Total
Range:	From 0.2Å up to 5000Å (RMS or RA)	★ Varies with Scan and User Setup	

■ Rotary Stage

Repeatability: ±0.01°
Accuracy: ±0.05°

■ Linear Stage

Repeatability: ±0.0005 inch (±0.01 mm)
Accuracy: ±0.0010 inch (±0.03 mm)

■ Operating Environment

41°F (5°C) to 104°F (40°C)

■ Data Generation

ASCII Data Files (Detailed), SPC Data Files, Color plots with Scan Notes,

■ Computer

Pentium class Computer, with optional Color Printer

■ Sample Holders

Standard Disks: 65mm, 95mm other sizes available

■ Materials

Aluminum, Nickel, Silicon, and other reflective materials

■ Installation

Electrical Requirements: 100-240 VAC – 50/60Hz Meets Class ten clean room requirements.

■ Shipping Weights

Computer: 70 lbs/32 kg
TMS-2000: 70 lbs / 32 kg
Total w/packing: 156 lbs. / 71 kg




**SCHMITT
MEASUREMENT
SYSTEMS, INC.**

A DIVISION OF SCHMITT INDUSTRIES, INC.



TMS RC Angstrom capabilities

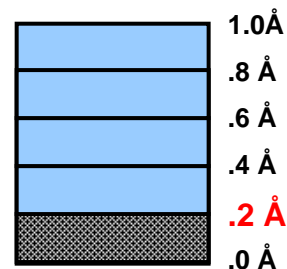


Phone 503-227-5178 • Fax 503-227-5040 • on the web at <http://www.schmitt-ind.com>

Patent #'s 5,661,556 and 5,625,451 other patents pending — Note: All Specifications are subject to change without notice
084-714-013 © Copyright 1999, Schmitt Industries, Inc. Last Modified on 07/03/03

TMS-2000 RC

SCATTER PATTERN SURROUNDING REFLECTED LASER BEAM

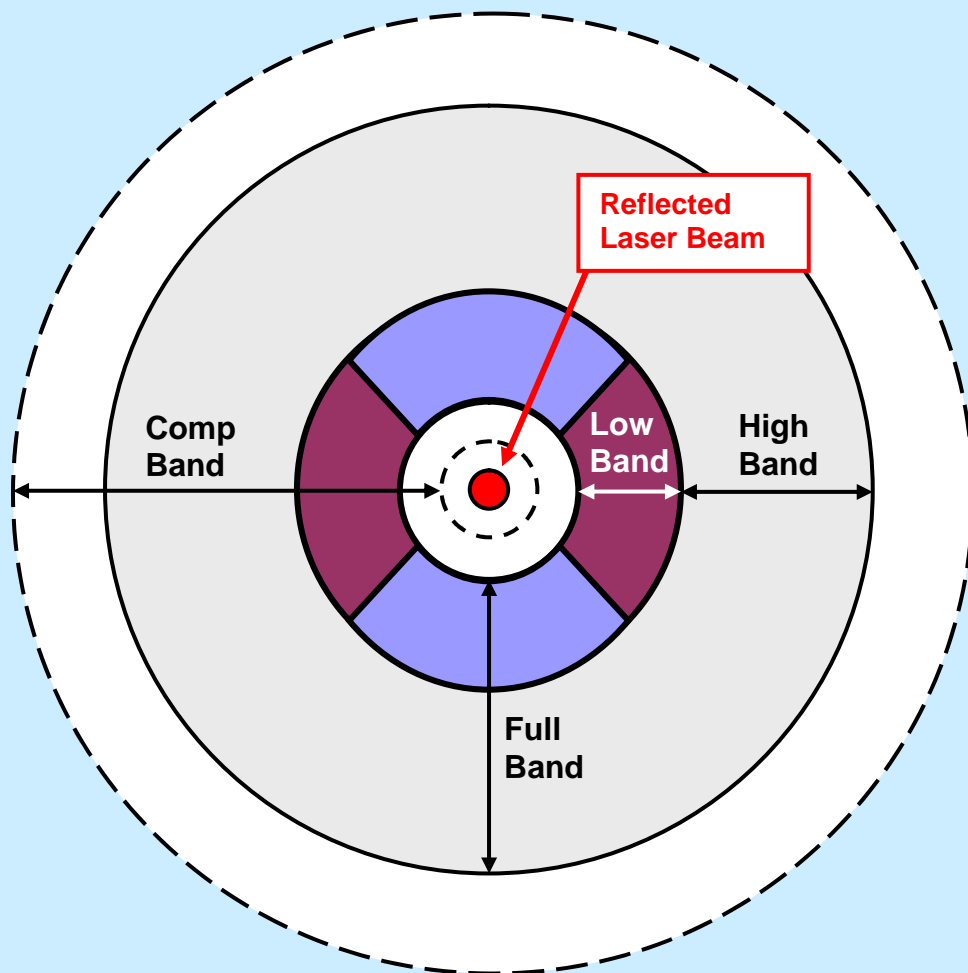

**SCHMITT
MEASUREMENT
SYSTEMS, INC.**

A DIVISION OF SCHMITT INDUSTRIALS, INC.

High Band



Radial




Circumferential



Schmitt Measurement Systems, Inc. 2765 NW Nicolai Street , Portland, OR 97210
Phone 503-227-5178 • Fax 503-227-5040 • on the web at <http://www.schmitt-ind.com>

TMS-2000RC

Radial & Circumferential Measurements for the next generation in disk media, Ultra smooth disks.

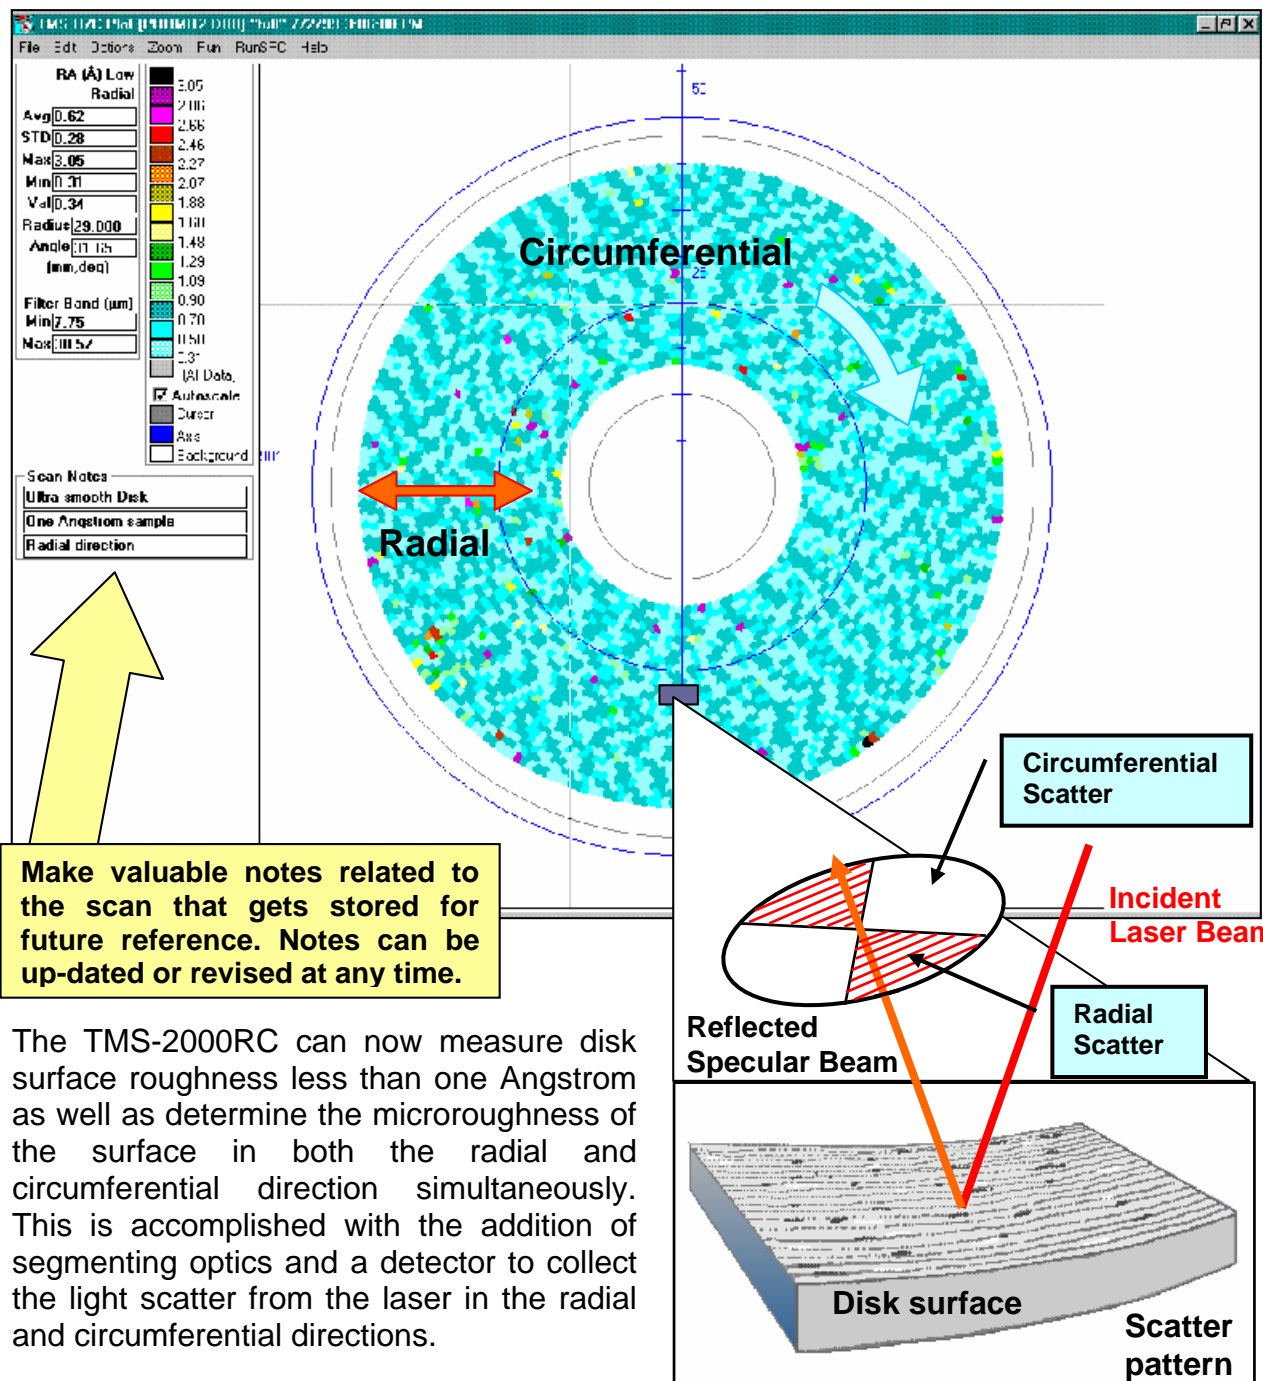

The TMS-2000RC can now measure disk surface roughness less than one Angstrom as well as determine the microroughness of the surface in both the radial and circumferential direction simultaneously. This is accomplished with the addition of segmenting optics and a detector to collect the light scatter from the laser in the radial and circumferential directions.